


## QS Wired Palladiom Keypad


The QS wired Palladiom Keypad allows the user to control Lutron load-control devices via a QS link.

### Features

- Large buttons are easy to use
- Buttons with white, backlit engraving make it easy to find and operate the keypad in low-light conditions
- Button engraving is easy to read
- Available in a variety of colors and finishes
- Keypad available in a variety of button marking options
- Wires to the QS Link
- Works within Quantum, myRoom Plus, and myRoom Prime systems
- Status of active button press or scene is indicated through intensity of backlighting
- Dynamic Backlighting Management (DBM) automatically adjusts backlighting intensity based on ambient lighting conditions
- Backlighting can also be programmed in Quantum and myRoom systems to adjust backlighting intensity

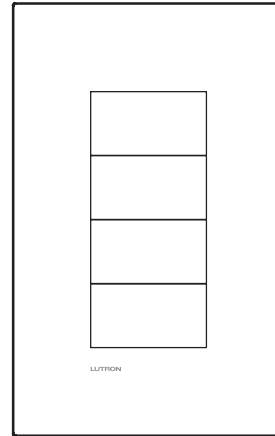

1-Gang U.S. Style

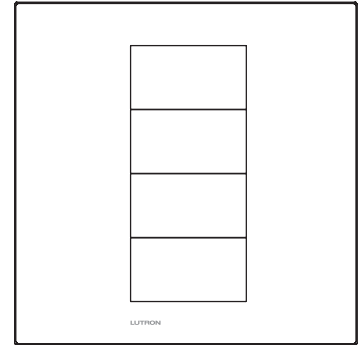








1-Column Square Style

### Colors and Finishes

#### Architectural Matte Finishes

	Almond <b>AL</b>
	Beige <b>BE</b>
	Black <b>BL</b>
	Brown <b>BR</b>
	Gray <b>GR</b>
	Ivory <b>IV</b>
	Light Almond <b>LA</b>
	Sienna <b>SI</b>
	Taupe <b>TP</b>
	White <b>WH</b>

#### Architectural Metal Finishes

	Bright Brass <b>BB</b>
	Bright Chrome <b>BC</b>
	Bright Nickel <b>BN</b>
	Polished Graphite <b>PG</b>
	Satin Brass <b>SB</b>
	Satin Chrome <b>SC</b>
	Satin Nickel <b>SN</b>

#### Glass Finish

	Clear Black Glass <b>CBL</b>
	Clear White Glass <b>CWH</b>

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
  - Architectural Matte Finishes: AM-CK-1
  - Architectural Metal Finishes: AMTL-CK-1

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

## Specifications

### Regulatory Approvals

- Lutron Quality Systems registered to ISO 9001:2008
- Complies with UL 508
- Complies with IEC 60669-2-1
- Complies with CSA C22.2 No. 14-13

### Power Input

- SELV/PELV/NEC® Class 2
- Operating voltage: 24–36 V $\overline{=}$  30 mA

### System Communication and Capacity

- SELV/PELV/NEC® Class 2 wiring connects Keypads to other devices on the QS Link
- A Quantum system can have up to 100 QS devices on the QS link
- A myRoom Plus or myRoom Prime system can have up to 50 QS devices on the QS link
- Each base unit counts as 1 device on the QS link
- Each button column of a QS wired Palladiom Keypad consumes 1 power draw unit (PDU) on the QS link. For complete information, see “Power Draw Units on the QS Link” (Lutron P/N 369405)

### Terminals

- Each terminal accepts up to two 18 AWG (1.0 mm<sup>2</sup>) wires.

### Environment

- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C)
- Maximum 90% non-condensing relative humidity
- Indoor use only

### Key Design Features

- Field-changeable button and faceplate assemblies allow for customization. See **How to Build a Model Number (Button Kits)** for more information
- Meets IEC 801-2. Tested to withstand 15 kV electrostatic discharge without damage or memory loss
- Faceplate snaps on with no visible means of attachment
- Use Faceplate or Button Kits to change color or engraving
- Engraving font: 11- or 14-pt Helvetica; special characters available (e.g., ç, ñ); Chinese and Arabic languages NOT available
- IP20 Rating
- Control operation complies with ADA standards for an accessible design

### Compatibility

- QS wired Palladiom Keypads are compatible with:
  - Quantum systems
  - myRoom Plus systems
  - myRoom Prime systems

### Mounting

- Typical U.S. style wallbox dimensions: 3.7 in (95 mm) H × 1.8 in (46 mm) W × 2.8 in (70 mm) D
- Typical Square style wallbox dimensions: 75 mm H × 75 mm W × ≥25 mm D
- Typical Round style wallbox dimensions:  $\phi$  68 mm × ≥25 mm D
- See **Mounting** for more details

Job Name:   Job Number:	Model Numbers:
----------------------------------	----------------



# Dimensions

## U.S. Style



Measurements shown as: in (mm)

### 1-Gang

Front View

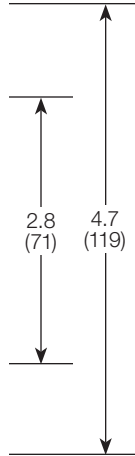
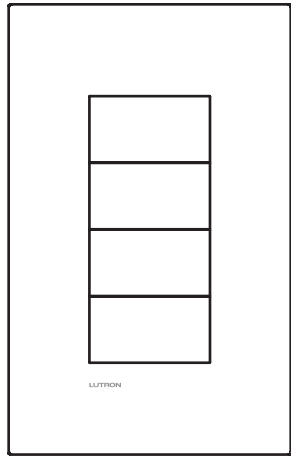


Side View

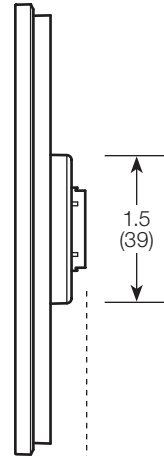



### 2-Gang

Front View






### 3-Gang

Front View

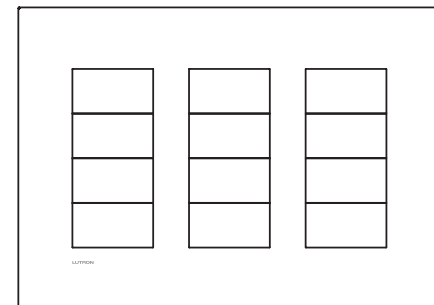

### 4-Gang

Front View

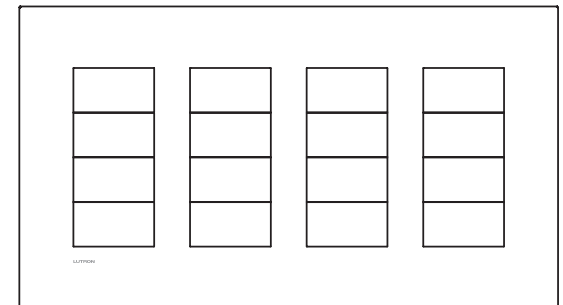

(continued on next page...)

<p><b>Job Name:</b></p> <p><b>Job Number:</b></p>	<p><b>Model Numbers:</b></p>
--	------------------------------



### Dimensions (continued)

#### Square Style




Measurements shown as: mm (in)

##### 1-Column

Front View


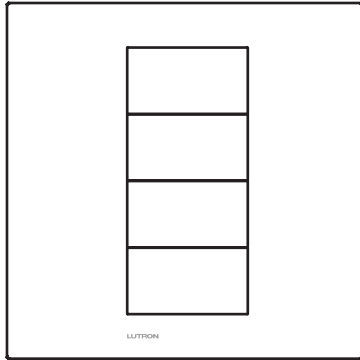


Side View

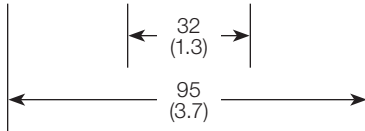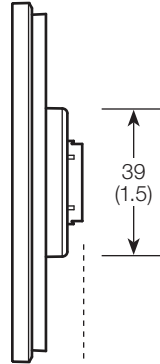




##### 2-Column

Front View



##### 4-Column

Front View

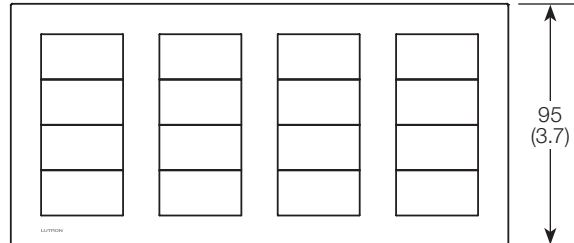

Job Name:  Job Number:	Model Numbers:
------------------------------	----------------

## How to Build a Model Number

### Keypads

**QWP – U – 2 W – WH – E**

#### System Type

**QWP:** Quantum

**MWP:** myRoom  
(Plus or Prime)

#### Faceplate Options

**B:** Base Unit without Faceplate

**U:** U.S. Style

**S:** Square Style

#### Button Configurations

*1-Gang/Column, U.S. or Square Style*

**2:** 2-Button

**3:** 3-Button

**4:** 4-Button

**R:** 3-Button with Raise/Lower

*2-Column Square Style\**

*Left Column      Right Column*

**22:** 2-Button      2-Button

**24:** 2-Button      4-Button

**2R:** 2-Button      3-Button with  
Raise/Lower

**R2:** 3-Button with  
Raise/Lower      2-Button

**RR:** 3-Button with  
Raise/Lower      3-Button with  
Raise/Lower

**42:** 4-Button      2-Button

**44:** 4-Button      4-Button

**4R:** 4-Button      3-Button with  
Raise/Lower

**R4:** 3-Button with  
Raise/Lower      4-Button

#### Backlighting

**W:** White

#### Colors and Finishes

*Architectural Matte  
Finishes*

**AL:** Almond

**BE:** Beige

**BL:** Black

**BR:** Brown

**GR:** Gray

**IV:** Ivory

**LA:** Light Almond

**SI:** Sienna

**TP:** Taupe

**WH:** White

*Architectural Metal  
Finishes*

**BB:** Bright Brass

**BC:** Bright Chrome

**BN:** Bright Nickel

**PG:** Polished Graphite

**SB:** Satin Brass

**SC:** Satin Chrome

**SN:** Satin Nickel

*Glass Finish*

**CBL:** Clear Black  
Glass

**CWH:** Clear White  
Glass

#### Engraving

See Engraving Options for more details

**E:** Predefined custom engraving<sup>\*/\*\*</sup>

**L01:** 2-Button Lights

**L02:** 2-Button with Raise/Lower Lights

**L03:** 3-Button Lights

**L04:** 3-Button with Raise/Lower Lights

**L05:** 4-Button Lights

**L06:** 2-Group Lights

**M01:** 2-Button Hotel Entry

**M02:** 2-Button Privacy Service

**M03:** 4-Button Hotel Scene

**S01:** 2-Button with Raise/Lower Shades

**S02:** 2-Button with Raise/Lower Shades  
(Shade printing)

**S03:** 2-Button with Raise/Lower Shades  
(Sheer printing)

**S04:** 2-Button with Raise/Lower Shades  
(Blackout printing)

**S05:** 3-Button with Raise/Lower Shades

**S06:** 2-Button Shades

\* Customer must provide engraving details at time of order.

\*\* Required for any 2-column keypad.

\* 2-column keypads require predefined custom engraving (-E)

### SPECIFICATION SUBMITTAL


Page

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

## How to Build a Model Number

### Button Kits

Use Button Kits to change color, button configuration, and engraving. Each Button Kit includes a button assembly.

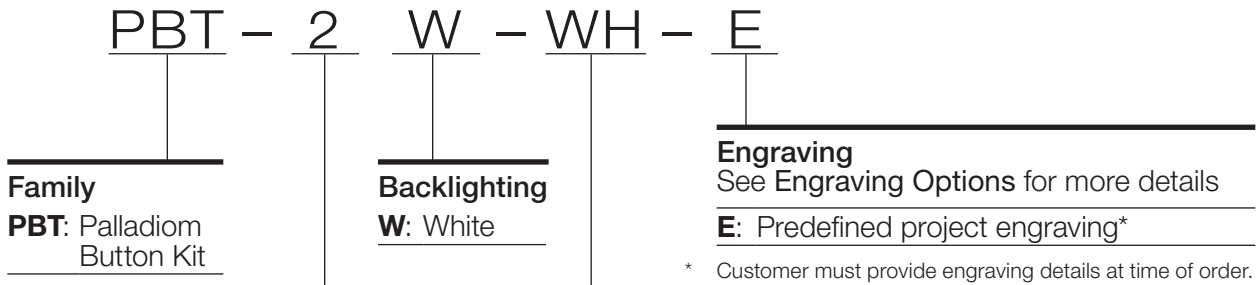

### Button Configurations

1-Gang/Column,  
U.S. or Square Style

**2:** 2-Button



**3:** 3-Button



**4:** 4-Button



**R:** 3-Button with Raise/Lower



### Colors and Finishes

Colors and Finishes for buttons and faceplates must always match (e.g., matte plastic buttons with matte plastic faceplate, metal buttons with metal faceplate).

#### Architectural Matte Finishes

- AL:** Almond
- BE:** Beige
- BL:** Black
- BR:** Brown
- GR:** Gray
- IV:** Ivory
- LA:** Light Almond
- SI:** Sienna
- TP:** Taupe
- WH:** White

#### Architectural Metal Finishes

- BB:** Bright Brass
- BC:** Bright Chrome
- BN:** Bright Nickel
- PG:** Polished Graphite
- SB:** Satin Brass
- SC:** Satin Chrome
- SN:** Satin Nickel

#### Glass Finish

- CBL:** Clear Black Glass
- CWH:** Clear White Glass



### Field Changes

#### Button engraving changes

Any keypad can have its buttons swapped in the field to change the engraving (e.g., 2-Button swapped for engraved 2-Button).

#### Button configuration changes

For easy system configuration changes, a 3-Button with Raise/Lower may be swapped in the field for a 4-Button.



Job Name:	Model Numbers:
Job Number:	

## How to Build a Model Number

### Faceplate Kits

Use Faceplate Kits to change color and ganging. Each Faceplate Kit includes a faceplate adapter and faceplate.

**LWT – U – P – WH**

#### Family

**LWT:** Palladiom  
Faceplate Kit

#### Faceplate Options

**U:** U.S. Style

**S:** Square Style

#### Gangs\* and Openings

**P\*\*:** Palladiom Keypad

#### Colors and Finishes

Colors and Finishes for buttons and faceplates must always match (e.g., matte plastic buttons with matte plastic faceplate, metal buttons with metal faceplate).

##### *Architectural Matte Finishes*

**AL:** Almond

**BE:** Beige

**BL:** Black

**BR:** Brown

**GR:** Gray

**IV:** Ivory

**LA:** Light Almond

**SI:** Sienna

**TP:** Taupe

**WH:** White

##### *Architectural Metal Finishes*

**QB:** Antique Brass

**QZ:** Antique Bronze

**BB:** Bright Brass

**BC:** Bright Chrome

**BN:** Bright Nickel

**PG:** Polished Graphite

**SB:** Satin Brass

**SC:** Satin Chrome

**SN:** Satin Nickel

##### *Glass Finish*

**CBL:** Clear Black  
Glass

**CWH:** Clear White  
Glass

\* Palladiom Keypads do not gang with other devices of different sizes (e.g., Maestro or GRAFIK T controls).

\*\* Repeat the letter designation "P" (4 maximum) for each opening (e.g., 1-gang = P, 2-gang = PP). See How to Select a Palladiom Keypad.


<p>Job Name:</p>  <p>Job Number:</p>	<p>Model Numbers:</p>
--	-----------------------

## Engraving Options

The Palladiom Keypad has engraving options ideal for many scenarios. The following information will help you determine which engraving option is best-suited to your needs.

### Standard Engraving (image details are subject to change)

Standard engraving options are designed for the most common instances. They are available only in the White (WH) plastic finish.

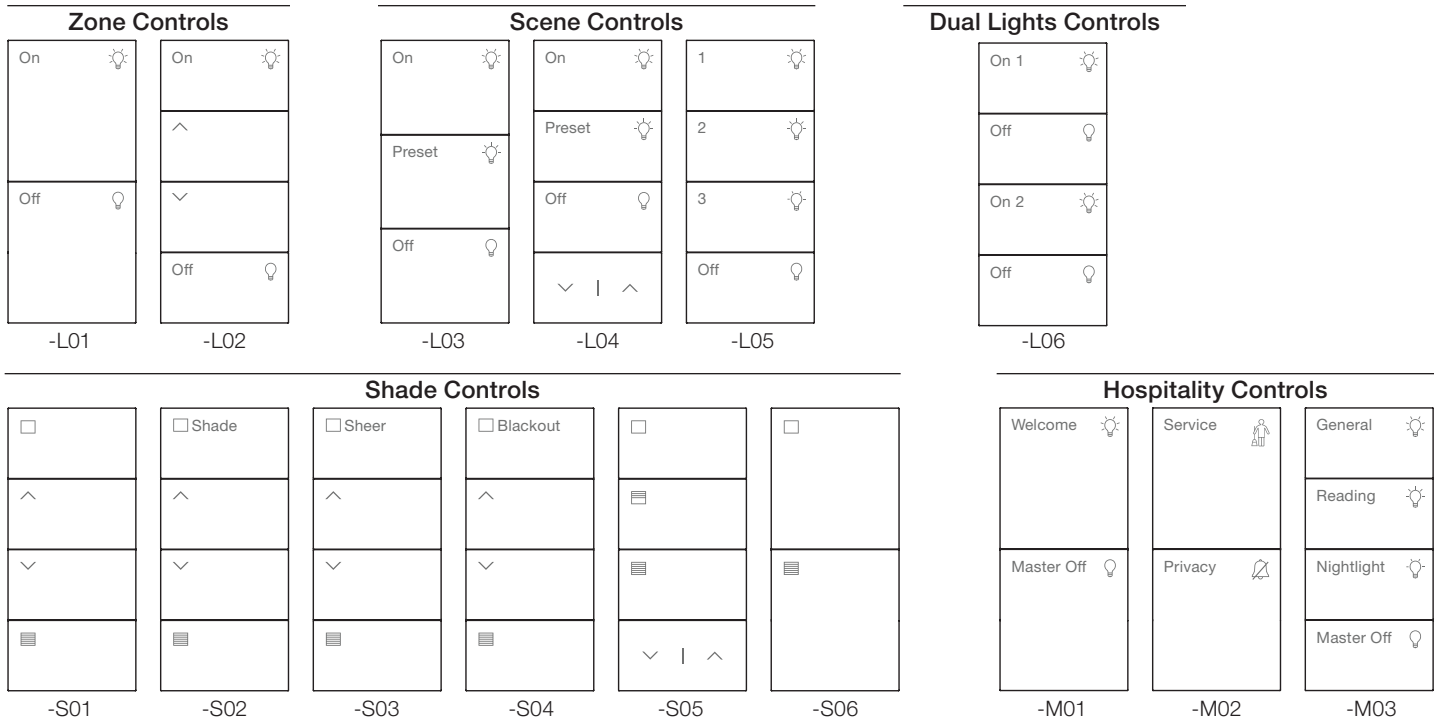


### Predefined Project Engraving

Predefined project engraving is for instances when the customer knows the engraving details at the time of purchase and does not wish to order two sets of button kits. To select this option, use engraving option “E” when ordering the keypad. **Note:** Orders will not be shipped until engraving details are received.

### Generic Engraving and Post-Defined Custom Engraving

When engraving details are not known or specified at the time an order is placed, the generic engraving icons shown below will be sent to provide the customer with a usable keypad until the custom engraving details are determined. This keypad will be shipped with an engraving certificate for ordering a custom-engraved button kit at a later time.

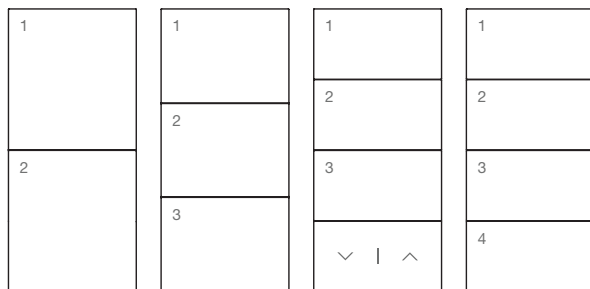

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	




# How to Select a Palladiom Keypad


Examples of keypad and faceplate configurations are shown below.

## U.S. Style


Model Number	Quantity	Assembled	Mount
<b>1-Gang Wallbox</b>			
QWP-U-4W-WH	1	Yes	U.S. Wallbox




<b>2-Gang Wallbox</b>			
QWP-B-4W-WH	2	No*	U.S. Wallbox
LWT-U-PP-WH	1		



<b>3-Gang Wallbox</b>			
QWP-B-4W-WH	3	No*	U.S. Wallbox
LWT-U-PPP-WH	1		




<b>4-Gang Wallbox</b>			
QWP-B-2W-WH	4	No*	U.S. Wallbox
LWT-U-PPPP-WH	1		




## Square Style

Model Number	Quantity	Assembled	Mount
<b>1-Column Wallbox</b>			
QWP-S-4W-WH	1	Yes	Square or Round Wallbox




<b>2-Column Wallbox</b>			
QWP-S-24W-WH	1	Yes	Square or Round Wallbox



3-button configuration not available.

<b>4-Column Wallbox</b>			
QWP-B-44W-WH	1	No*	2 Square or Round Wallboxes
QWP-B-22W-WH	1		
LWT-S-PPPP-WH	1		



3-button configuration not available.


\* Model numbers must be ordered as separate pieces and assembled. See Keypad Assembly.

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

# Keypad Assembly

Tools Required: Phillips head screwdriver (not included)

1. Place button kit on back of faceplate.
2. Align bulk unit over button kit and faceplate.
3. Assemble using 4 screws (provided).
4. Repeat steps 1–3 for each base unit.

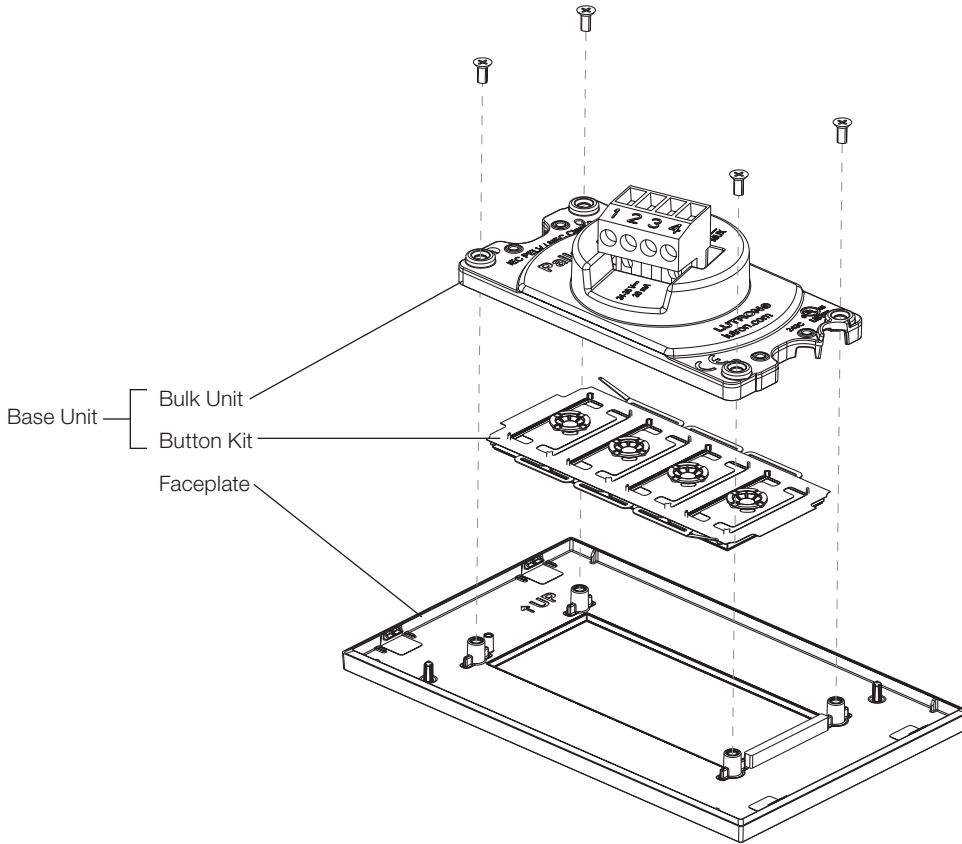


Job Name:	Model Numbers:
Job Number:	


# Mounting

## U.S. Style


### 1-Gang

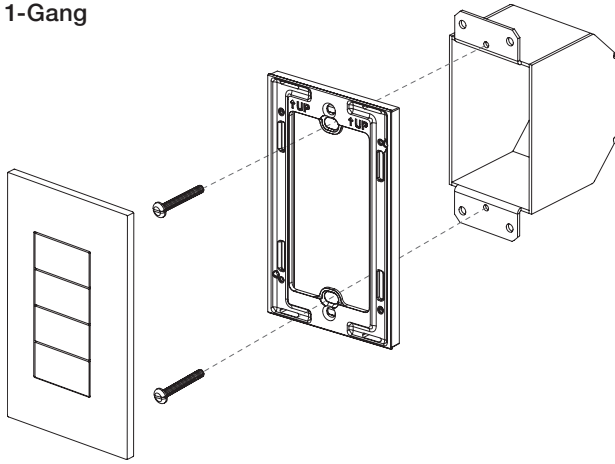


Back View



### 2-Gang

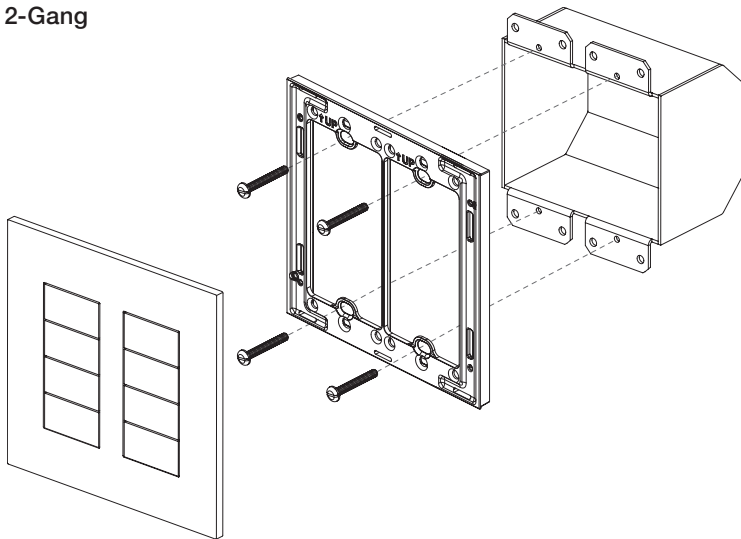

Back View




(continued on next page...)

Job Name:	Model Numbers:
Job Number:	


### Mounting (continued)

### U.S. Style (continued)


#### 3-Gang

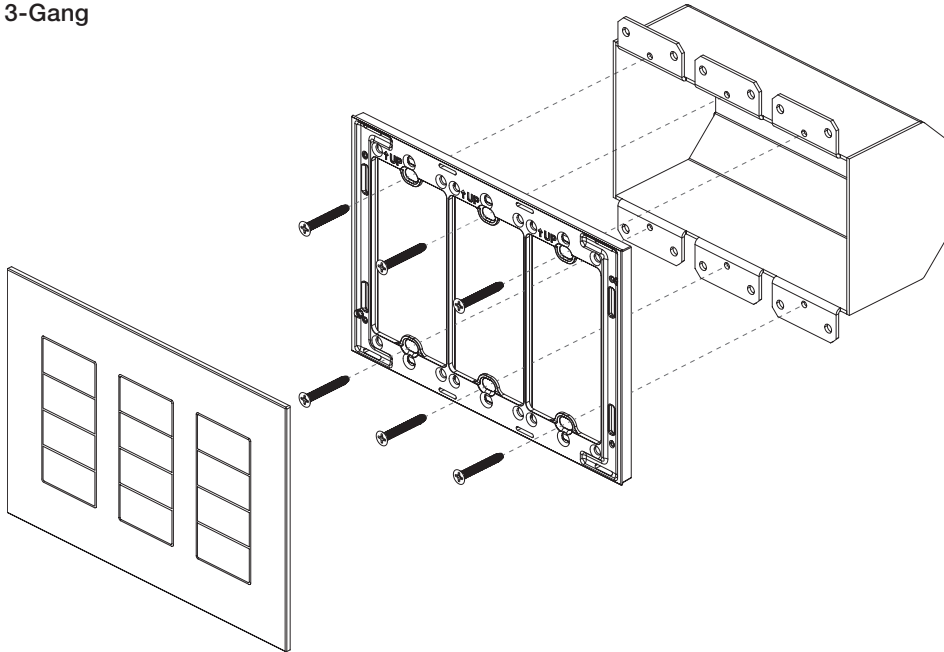


Back View

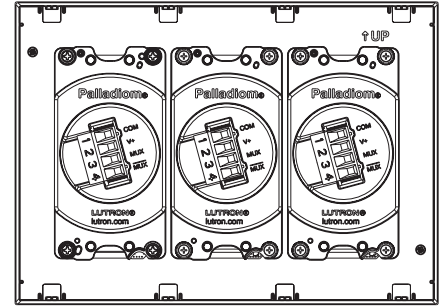

#### 4-Gang

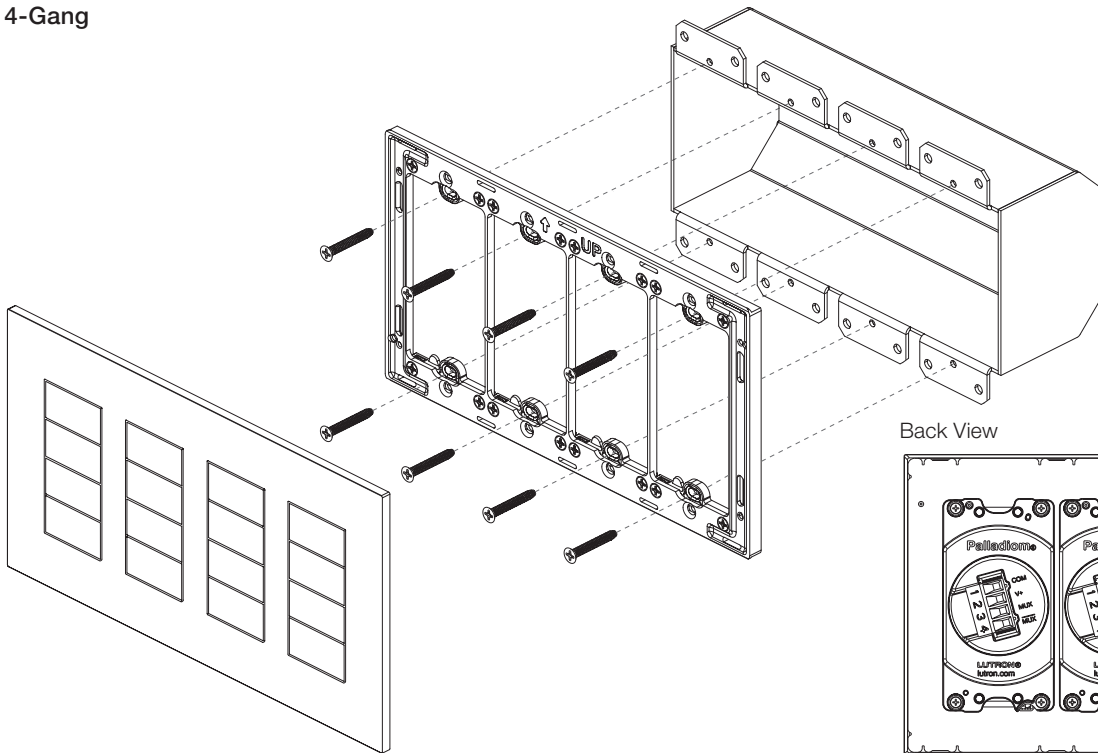

Back View

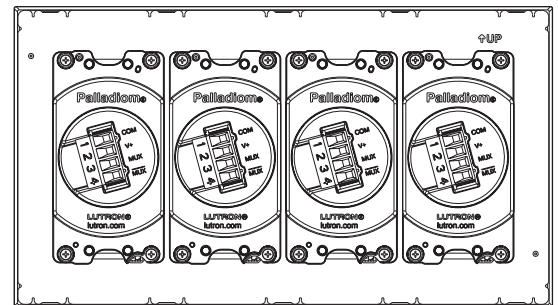


(continued on next page...)

Job Name:	Model Numbers:
Job Number:	

**Mounting** (continued)


**Square Style** (Square or Round Wallbox\*)

**1-Column**

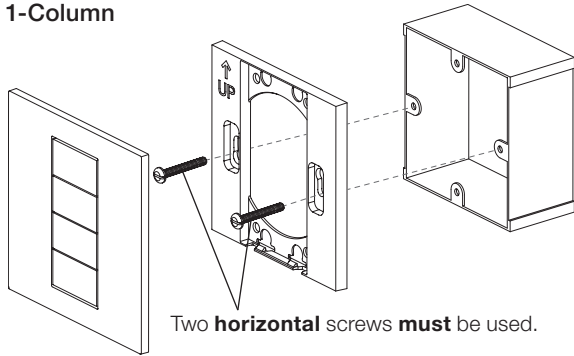


Two **horizontal** screws **must** be used.

Back View




**2-Column**

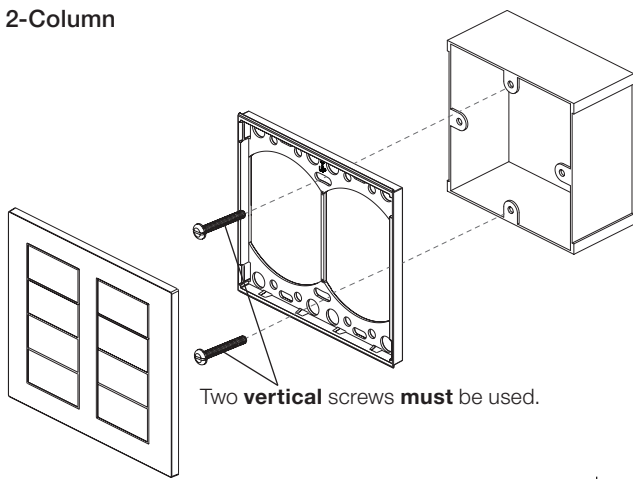

Two **vertical** screws **must** be used.


Back View




**Note:** 2-column keypad shown. Two 1-column keypads cannot mount to a wallbox.

**4-Column**

Measurements shown as: mm (in)

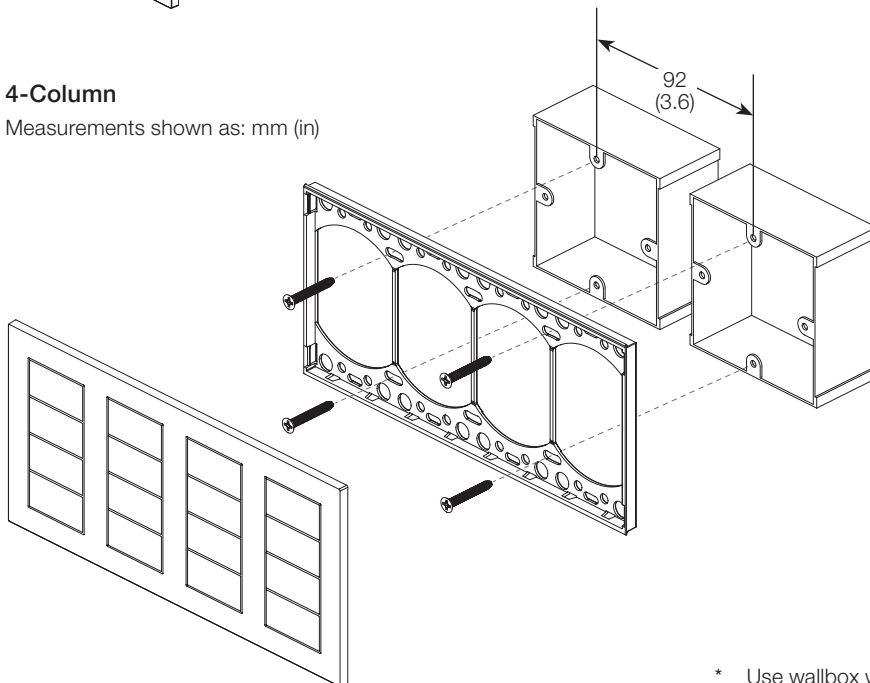

Back View

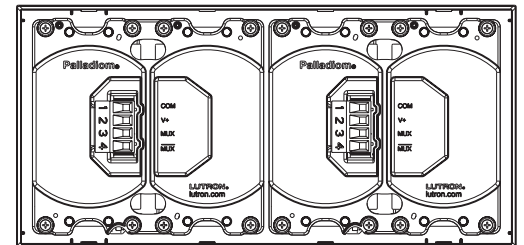

**Note:** Two 2-column keypads shown. Four 1-column keypads cannot mount to a wallbox.

\* Use wallbox with 4 available mounting screw holes for maximum flexibility.

Job Name:	Model Numbers:
Job Number:	

## QS Link Wiring

- Use SELV/PELV/NEC® Class 2 wiring to connect keypads to the QS link.
- Connect two 22 AWG (0.5 mm<sup>2</sup>) shielded, twisted pairs of wires to terminals 3 and 4 of the keypad control link connector. Shielding (drain) of the twisted-pair wires must be connected together as shown, but do not connect the shielding to earth/ground or to the keypad and do not allow the shielding to contact the grounded wallbox.
- Connect the appropriate size wires to terminals 1 and 2 for power according to your link length (see table below).


**Note:** Use appropriate wire connecting devices as specified by local codes.

- Each base unit model number counts as 1 device on the QS link.
- Each button column of a QS wired Palladiom Keypad consumes 1 power draw unit (PDU) on the QS link. For complete information, see “Power Draw Units on the QS Link” (Lutron P/N 369405).


### QS Link Wire Sizes (check compatibility in your area)

QS Link Wiring Length	Wire Gauge	Lutron Cable Model Number
Less than 500 ft (153 m)	Power (terminals 1, 2): 1 pair 18 AWG (1.0 mm <sup>2</sup> )	GRX-CBL-346S (non-plenum) GRX-PCBL-346S (plenum)
	Data (terminals 3, 4): 1 shielded, twisted pair 18 AWG to 22 AWG (1.0 mm <sup>2</sup> to 0.5 mm <sup>2</sup> )	
500 ft to 2000 ft (153 m to 610 m)	Power (terminals 1, 2): 1 pair 12 AWG (4.0 mm <sup>2</sup> )	GRX-CBL-46L (non-plenum) GRX-PCBL-46L (plenum)
	Data (terminals 3, 4): 1 shielded, twisted pair 18 AWG to 22 AWG (1.0 mm <sup>2</sup> to 0.5 mm <sup>2</sup> )	

#### Link Wiring less than 500 ft (153 m)

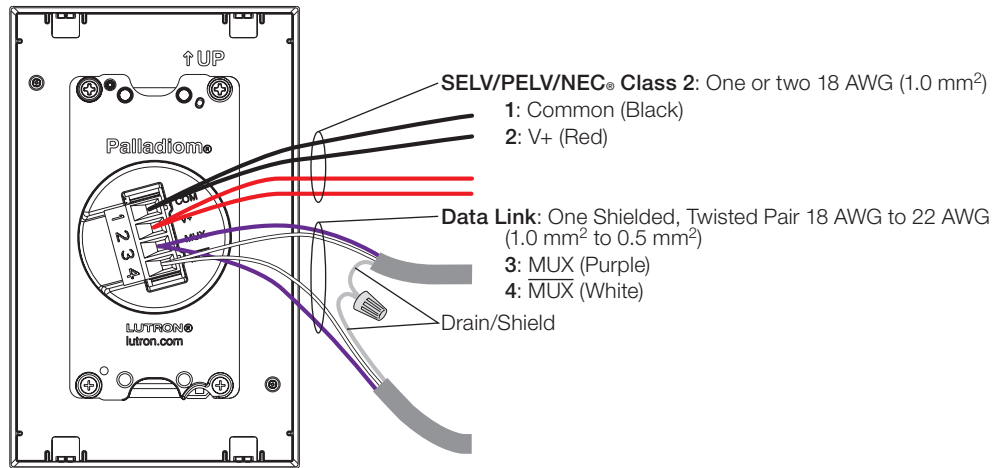

#### Link Wiring 500 ft to 2000 ft (153 m to 610 m)

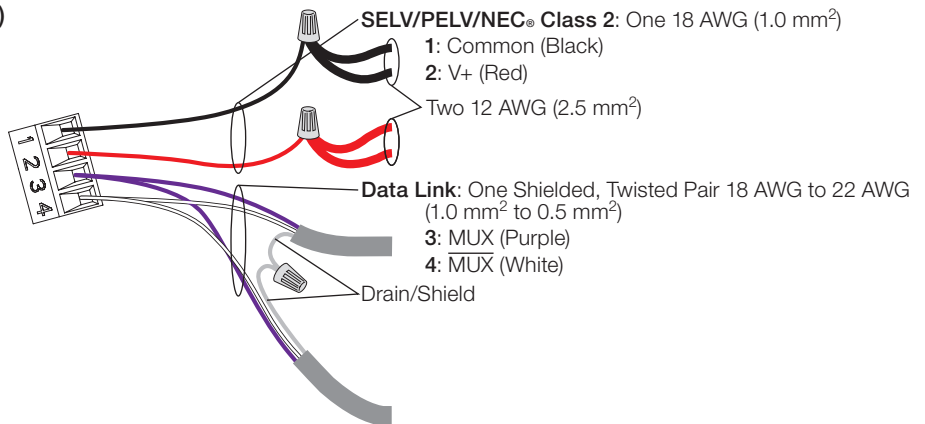

Lutron, Lutron, Palladiom, Quantum, and Maestro are trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries.

myRoom and GRAFIK T are trademarks of Lutron Electronics Co., Inc.

## LUTRON SPECIFICATION SUBMITTAL

Page

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	